



**Emtelle UK Ltd.**  
 Haughhead  
 Hawick TD9 8LF  
 United Kingdom

info@emtelle.com  
 emtelle.com

## Product Datasheet MHT 1563 DBmf Bundles (10/6)




### Product Description

Assemblies of 10/6 polyethylene (PE) microducts (m/d), each with low friction performance. These metal-free bundles are designed for direct burial in suitably prepared ground.

### Product Benefits


Microducts are tested according to IEC 60794-5	Blowing track: 2000 m Performance confirmed	Em-Liner for Low Friction and best blowing results	UV-Protection up to 2 years in EU	Pressure tight up to 15 bar

### Application and Design

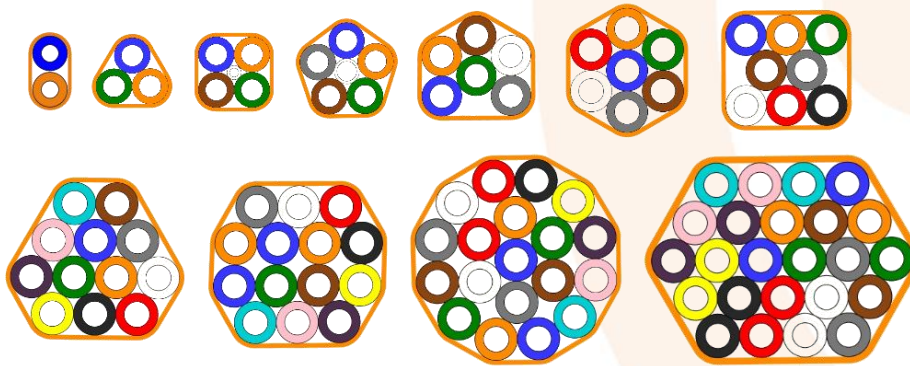

**Inner surface:**  
 Smooth or ribbed + Em-Liner

**Colour identification of single ducts:**  
 Translucent with stripes or uni coloured possible

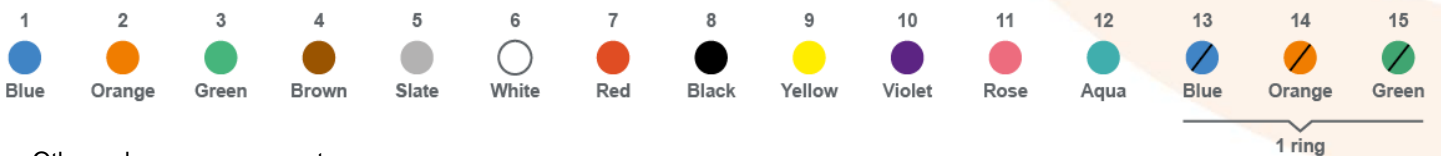

Other colours upon request

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website. This document is protected by copyright (c) Emtelle Group [2020]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers. [www.emtelle.com](http://www.emtelle.com)

**Generic Details: Single Microduct**

Material	Polyethylene HDPE
Outer diameter	10.0 mm
Inner diameter	6.0 mm
Mass, nominal	48 g/m
Min. bending radius of primary duct*	120 mm
Max. Blowing pressure	15 bar

\*This radius relates to the m/d capability only, and does not indicate a suitable radius for blowing FU.

1. These m/ds are compatible with designated 10 mm push-fit connectors.
2. Max air pressure for blowing: 15 bar.
3. Storage of unprotected primary microducts: Indoors and well shielded from daylight.

**Generic Details: Microduct Bundle**

Material	Polyethylene HDPE
Wall thickness	1.1mm
Number single ducts	2-24

**Product-Specific Details**

Type	Outer Diameter	Mass	Max. Pull Tension (Installation)	Min. Bend Radius
<b>10/6mm</b>				
2-WAY DBMF	12,2 x 22,2 mm	153 g/m	1,4 kN / 140 kg	200 mm
3-WAY DBMF	23.8 mm	212 g/m	1.9 kN/ 190 kg	350 mm
4-WAY DBMF	26,3 mm	277 g/m	2,5 kN / 250 kg	340 mm
5-WAY DBMF	29,2 mm	343 g/m	3,0 kN / 300 kg	450 mm
6-WAY DBMF	32,2 mm	384 g/m	3,5 kN / 350 kg	550 mm
7-WAY DBMF	32,2 mm	435 g/m	4,0 kN / 400 kg	550 mm
8-WAY DBMF	38,7 mm	463 g/m	4,25 kN / 425 kg	697mm
12-WAY DBMF	42,8 mm	706 g/m	6,5 kN / 650 kg	750 mm
14-WAY DBMF	46,1 mm	817 g/m	7,5 kN / 750 kg	876 mm
19-WAY DBMF	50,3 mm	1024 g/m	9,5 kN / 950 kg	956 mm
24-WAY DBMF	62,2 mm	1154 g/m	10,5 kN / 1050 kg	1080 mm

\* After applying pulling tensions, allow time for the pulled product to relax. See Installation manual.

**Operating Parameters**

Installation temperature	-20°C...+40°C
Transportation and storage temperature	-40°C...+60°C
Installation + Blowing ideal	+5°C...+20°C

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website. This document is protected by copyright (c) Emtelle Group [2020]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers. [www.emtelle.com](http://www.emtelle.com)

Testing		
Crush	IEC 60794-1-2-Method E3	Procedure to IEC 60794-5
Impact	IEC 60794-1-2-Method E4	Procedure to IEC 60794-5
Kink	IEC 60794-1-2-Method E10	Procedure to IEC 60794-5
Flexibility	IEC 60794-1-2-Method E11	Procedure to IEC 60794-5

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website. This document is protected by copyright (c) Emtelle Group [2020]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers. [www.emtelle.com](http://www.emtelle.com)